

12" Woofer for low and mid bass professional sound reinforcement, offering high power capacity, outstanding low end response and exceptionally smooth transition into the vocal range. This new design is capable of handling up to 1,200 Watts Continuous Music.

The 12WS600 is ideal for side fill as well as front of house cabinets. This woofer exhibits outstanding acoustics with work horse construction. Designed for smaller enclosures, the 12WS600 is a versatile, high performance woofer. General construction includes a sturdy cast frame, an impregnated cloth surround, impregnated long fiber paper cone and stable double spider.

The 12WS600 woofer incorporates, a large magnetic assembly central hole and 6 windows on the frame which increases heat dissipation and reduces operating temperature increasing the output power with reduced power compression.



### SPECIFICATIONS

Nominal diameter	305 (12)	mm (in)
Nominal impedance	8	
Minimum impedance @ 212 Hz	7.4	
Power handling		
Peak	2,400	W
Continuous Music <sup>1</sup>	1,200	W
NBR <sup>2</sup>	600	W
AES <sup>3</sup>	450	W
Sensitivity (2.83V@1m) averaged from 100 to 500 Hz	95	dB SPL
Power compression @ 0 dB (nom. power)	3.3	dB
Power compression @ -3 dB (nom. power)/2	2.2	dB
Power compression @ -10 dB (nom. power)/10	0.6	dB
Frequency response @ -10 dB	45 to 3,000	Hz

<sup>1</sup> Power handling specifications refer to normal speech and/or music program material, reproduced by an amplifier producing no more than 5% distortion. Power is calculated as true RMS voltage squared divided by the nominal impedance of the loudspeaker

<sup>2</sup> NBR Standard (10,303 Brazilian Standard).

<sup>3</sup> AES Standard (60 - 600 Hz).

### THIELE-SMALL PARAMETERS

Fs	46	Hz
Vas	60(2.11)	l (ft <sup>3</sup> )
Qts	0.34	
Qes	0.35	
Qms	10.98	
o (half space)	1.63	%
Sd	0.0530 (82.15)	m <sup>2</sup> (in <sup>2</sup> )
Vd (Sd x Xmax)	227.9 (13.91)	cm <sup>3</sup> (in <sup>3</sup> )
Xmax (max. excursion (peak) with 10% distortion)	4.3 (0.17)	mm (in)
Xlim (max. excursion (peak) before physical damage)	21 (0.82)	mm (in)

Atmospheric conditions at TS parameter measurements:

Temperature	24 (75)	°C (°F)
Atmospheric pressure	1,020	mb
Humidity	56	%

Thiele-Small parameters are measured after a 2-hour power test using half AES power. A variation of ±15% is allowed.

### ADDITIONAL PARAMETERS

L	21.3	Tm
Flux density	0.98	T
Voice coil diameter	100 (4)	mm (in)
Voice coil winding length	29.7 (97.4)	m (ft)
Wire temperature coefficient of resistance ( )	0.00388	1/°C
Maximum voice coil operation temperature	225 (437)	°C (°F)
vc (max. voice coil operation temp./max. power)	0.50 (0.97)	°C/W (°F/W)
Hvc (voice coil winding depth)	18.0 (0.71)	mm (in)
Hag (air gap height)	9.5 (0.37)	mm (in)
Re	7.2	
Mms	77.23 (0.170)	g (lb)
Cms	1.50	m/N
Rms	2.045	kg/s

### NON-LINEAR PARAMETERS


Le @ Fs (voice coil inductance @ Fs)	4.071	mH
Le @ 1 kHz (voice coil inductance @ 1 kHz)	2.135	mH
Le @ 20 kHz (voice coil inductance @ 20 kHz)	1.138	mH
Red @ Fs	0.377	
Red @ 1 kHz	4.83	
Red @ 20 kHz	58.053	
Krm	3.4	m
Kxm	13.4	mH
Erm	0.83	
Exm	0.79	

### ADDITIONAL INFORMATION

Magnet material	Barium ferrite
Magnet weight	2,640 (94) g (oz)
Magnet diameter x depth	200 x 24 (7.87 x 0.95) mm (in)
Magnetic assembly weight	6,900 (15.43) g (lb)
Frame material	Aluminum
Frame finish	Black Silver epoxy
Voice coil material	Copper
Voice coil former material	Polyimide
Cone material	Long fiber pulp
Volume displaced by woofer	4.0 (0.141) l (ft <sup>3</sup> )
Net weight	7,420 (16.36) g (lb)
Gross weight	8,200 (18.07) g (lb)
Carton dimensions (W x D x H)	34 x 34 x 15.5 (13.4 x 13.4 x 6.1) cm (in)


### MOUNTING INFORMATION

Number of bolt-holes	8
Bolt-hole diameter	7.0 (0.27) mm (in)
Bolt-circle diameter	294 (11.58) mm (in)
Baffle cutout diameter (front mount)	280 (11) mm (in)
Baffle cutout diameter (rear mount)	275 (10.83) mm (in)
Connectors	Silver-plated push terminals
Polarity	Positive voltage applied to the positive terminal (red) gives forward cone motion
Minimum clearance between the back of the magnetic assembly and the enclosure wall	75 (3) mm (in)

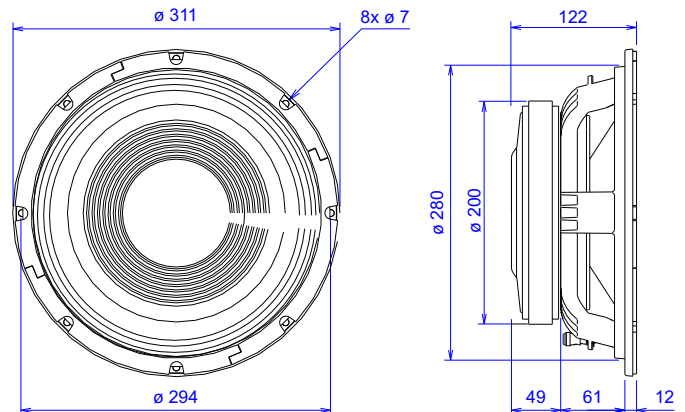


Dimensions in mm.


### RESPONSE CURVES (0° AND 45°) IN A TEST ENCLOSURE INSIDE AN ANECHOIC CHAMBER, 1 W / 1 m

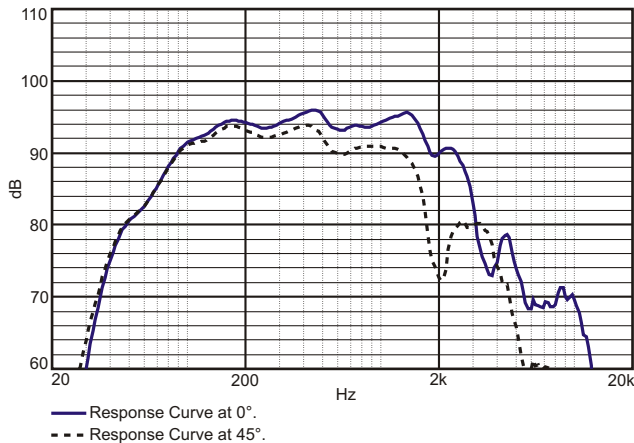

### IMPEDANCE AND PHASE CURVES MEASURED IN FREE-AIR

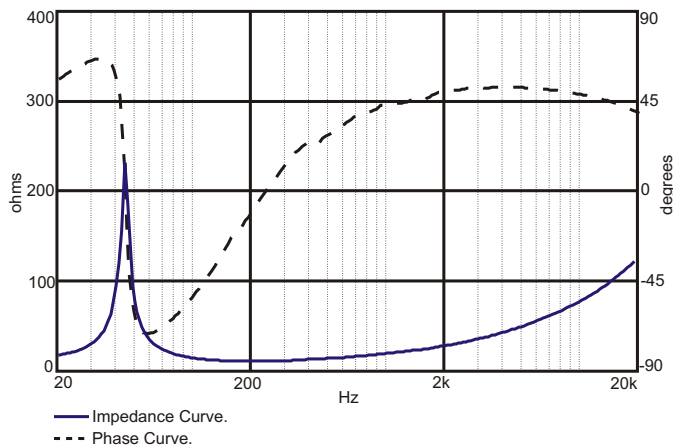


### HARMONIC DISTORTION CURVES MEASURED AT 10% AES INPUT POWER, 1 m

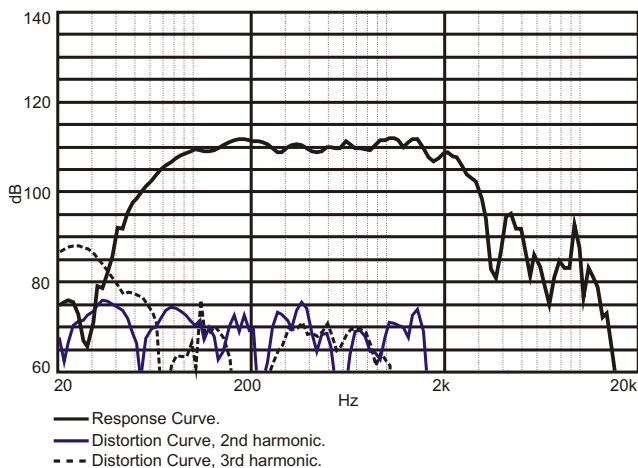

### TEST ENCLOSURE

35-liter volume with a duct  $\varnothing 3"$  by 1.97" length.

### POLAR RESPONSE CURVES

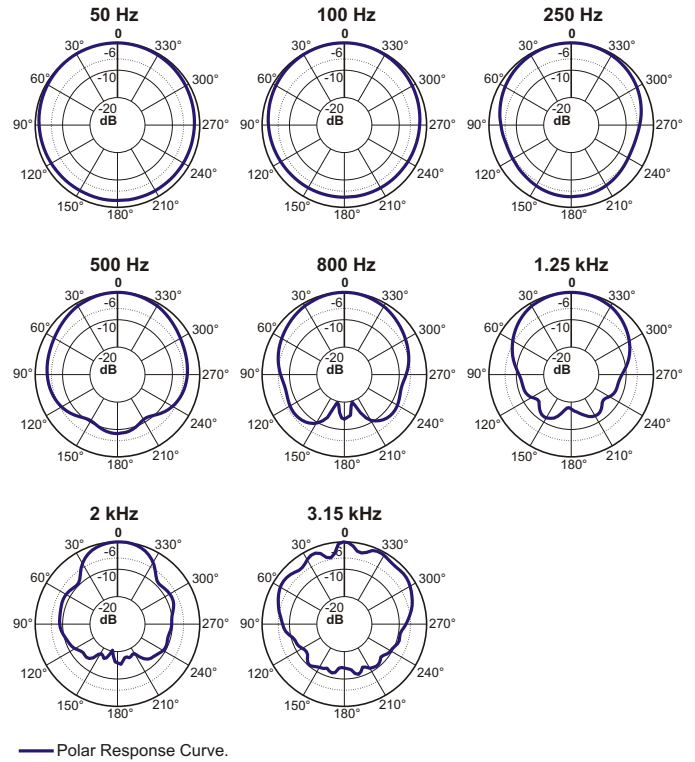

### HOW TO CHOOSE THE RIGHT AMPLIFIER

The power amplifier must be able to supply twice the RMS driver power. This 3 dB headroom is necessary to handle the peaks that are common to musical programs. When the amplifier clips those peaks, high distortion arises and this may damage the transducer due to excessive heat. The use of compressors is a good practice to reduce music dynamics to safe levels.

### FINDING VOICE COIL TEMPERATURE

It is very important to avoid maximum voice coil temperature. Since moving coil resistance ( $R_c$ ) varies with temperature according to a well known law, we can calculate the temperature inside the voice coil by measuring the voice coil DC resistance:

$$T_B = T_A \frac{R_B}{R_A} - 1 \quad T_A = 25 \quad \frac{1}{25}$$

$T_A, T_B$  = voice coil temperatures in °C.

$R_A, R_B$  = voice coil resistances at temperatures  $T_A$  and  $T_B$ , respectively.  
= voice coil wire temperature coefficient at 25 °C.

### POWER COMPRESSION

Voice coil resistance rises with temperature, which leads to efficiency reduction. Therefore, if after doubling the applied electric power to the driver we get a 2 dB rise in SPL instead of the expected 3 dB, we can say that power compression equals 1 dB. An efficient cooling system to dissipate voice coil heat is very important to reduce power compression.

### NON-LINEAR VOICE COIL PARAMETERS

Due to its close coupling with the magnetic assembly, the voice coil in electrodynamic loudspeakers is a very non-linear circuit. Using the non-linear modeling parameters  $K_{rm}$ ,  $K_{xm}$ ,  $E_{rm}$  and  $E_{xm}$  from an empirical model, we can calculate voice coil impedance with good accuracy.

### SUGGESTED PROJECTS

VB1205B1 VB1205D1 HB1205A1 HB1205A3 HB1205D1

For additional project suggestions, please access our website.