



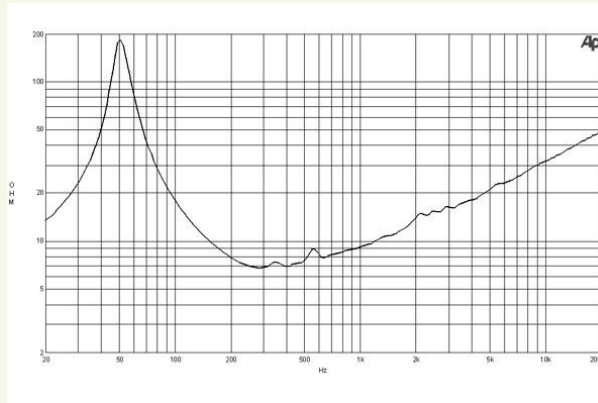

# 12PE32 | Mid-Bass

500 W continuous program power capacity  
64 mm (2.5 in) aluminium voice coil  
50 – 4000 Hz response  
101.5 dB sensitivity

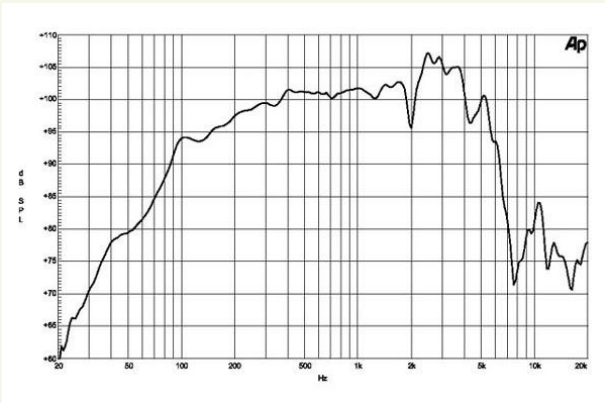

Horns  
HF Drivers  
Coaxials  
LF Nd Drivers  
LF Drivers

## Specification

Nominal Diameter	320 (12) mm (in)
Nominal Impedance (1)	8 Ohm
Minimum Impedance	6.7 Ohm
Nominal Power Handling (2)	250 W
Continuous Power Handling (3)	500 W
Sensitivity (1W/1m) (4)	101.5 dB
Frequency Range	50 - 4000 Hz
Voice Coil Diameter	65 (2.5) mm (in)
Winding Material	Aluminium
Former Material	Glass Fibre
Winding Depth	12 (1/2) mm (in)
Magnetic Gap Depth	7 (9/32) mm (in)
Flux Density	1.4 T

## Thiele & Small Parameters

Fs	51 Hz
Re	5.8 Ohm
Qes	0.19
Qms	7.6
Qts	0.18
Vas	101 (3.56) dm3 (ft3)
Sd	522 (80.9) cm2 (in2)
Eta Zero	6.8 %
Xmax	+/- 2.8 mm
Xvar	+/- 5 mm
Mms	37 g
Bl	19.1 Txm
Le	1.2 mH

## Mounting and Shipping Info

Overall Diameter	316 mm (12.4 in)
Bolt Circle Diameter	296 mm (11.6 in)
Baffle Cutout Diameter	282 mm (11.1 in)
Depth	135 mm (5.3 in)
Flange and Gasket Thickness	16 mm (5/8 in)
Net Weight	7.6 kg (16.7 lb)
Shipping Weight	8.4 kg (18.7 lb)
Shipping Box	380x380x180 mm (15x15x6.7 in)

- <sup>1</sup>For different impedances, please ask.
- <sup>2</sup>2 hours test made with continuous pink noise signal (6 dB crest factor). Power calculated on rated minimum impedance.
- <sup>3</sup>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- <sup>4</sup>Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

