

BL15-400X




Not every player wants a super-clean, high-fidelity bass sound.

Characterised by an extended low end and greater linear excursion, Green Label speakers push out every note with a rich, warm tone and a powerful low-end thump.

Available with Ferrite or Neodymium magnets, Green Label speakers are primed for high-powered rock performances, where a full-bodied, warm, defined tone is essential.

8 Frequency Response

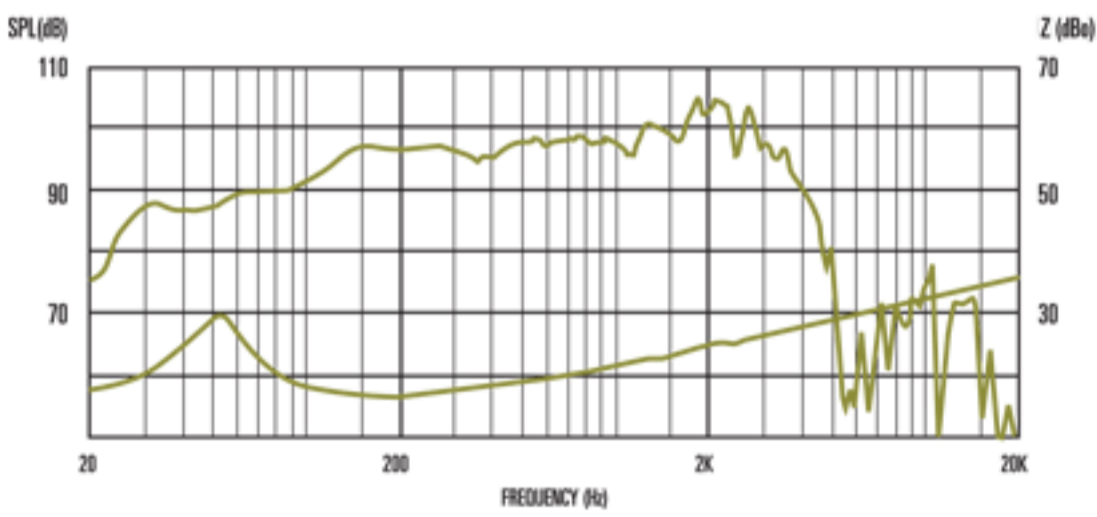

General Specifications

Nominal diameter	381mm/15in
Power rating	400Wrms
Nominal impedance	8
Sensitivity	96dB
Magnet type	Ferrite
Voice coil diameter	76.2mm/3in
Coil material	Copper
Cone material	Kevlar loaded paper
Former material	Polyimide
Surround material	Cloth-sealed
Frequency range	40-3500Hz
Xmax	4.75mm/0.18in
Gap depth	8mm/0.31in
Voice coil winding width	17.5mm/0.68in

Small Signal Parameters

D	0.33m/12.99in
Fs	54.2Hz
Mair	14.15g/0.499oz
Mmd	66.47g/2.35oz
Qms	3.578
Qes	0.709
Qts	0.592
Re	5.8
Vas	110.85lt/3.91ft ³
Bl	14.98Tm
Cms	0.107mm/N
Rms	7.67kg/s
Le (at 1kHz)	1.0mH

Mounting Information

Cut-out diameter	351mm/13.8in
Diameter	385mm/15.2in
Mounting slot dimensions	9.2 x 6.2mm/0.36 x 0.24in
Mounting slot PCD	369mm/14.5in
Number of mounting slots	8
Overall depth	162mm/6.4in
Unit weight	4.9kg/10.8lb