



CDX1-1430

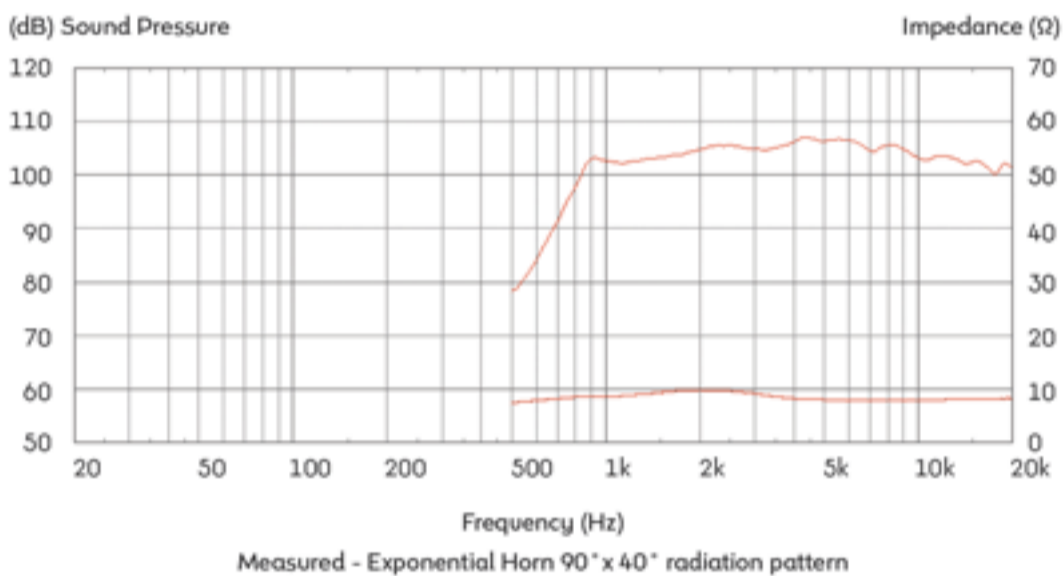

- 2,500Hz recommended min. crossover freq (12dB/oct)
- Aluminium diaphragm with elastomer surround
- Copper Inductance sleeve for improved HF performance

8 Frequency Response

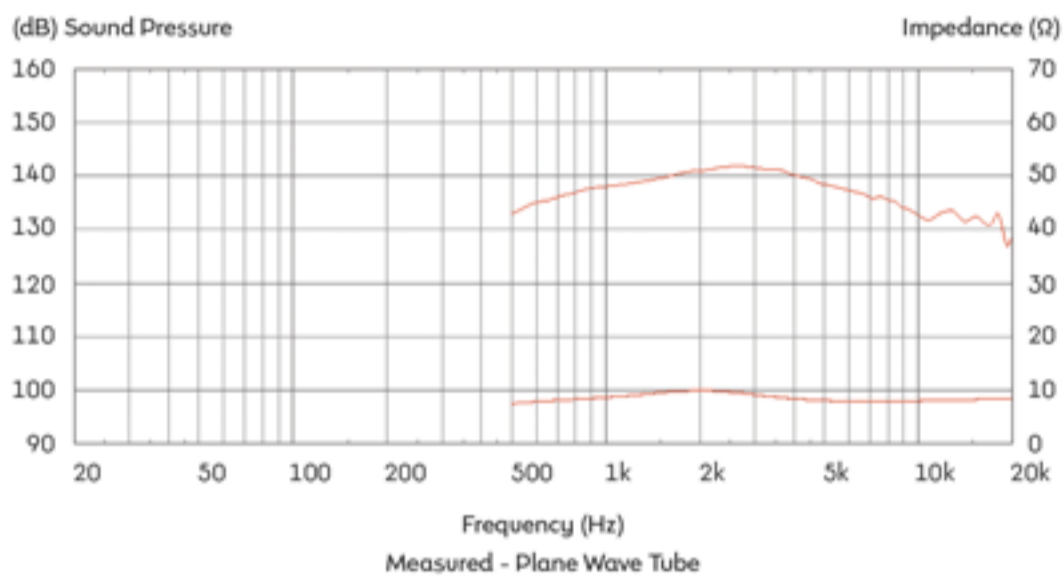

1. Tested for two hours on plane wave tube using continuous band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Measured on axis at 1W/1m, using typical horn, in 2^l anechoic environment.

General Specifications

Power rating ¹	50Wrms
Continuous power rating ²	100W
Nominal impedance	8
Sensitivity ³	108dB
Frequency range	2000-20,000Hz
Recommended min. crossover (12dB/oct)	2,500Hz
Voice coil diameter	35mm/1.4in
Voice coil material	Copper clad aluminium
Magnet type	Neodymium
Diaphragm material	Aluminium
Surround material	Elastomer

Mounting Information

Maximum width	90mm/3.5in
Depth	58mm/2.3in
Weight	0.47kg/1.0lb
Fitting	Flange (2 x M6 holes on 76mm, 3.0in PCD)
Throat exit	25.0mm/1in

Packed Dimensions & Weight

Single pack size W x D x H	90mm x 90mm x 60mm /3.5in x 3.5in x 2.4in
Single pack weight	0.6kg/1.3lb
Multi pack size W x D x H	345mm x 370mm x 245mm /13.6in x 14.6in x 9.6in
Multi pack weight	12.5kg/28lb