


TF1018



- 10" speaker drive providing 96dB sensitivity and 100Wrms

8 Frequency Response

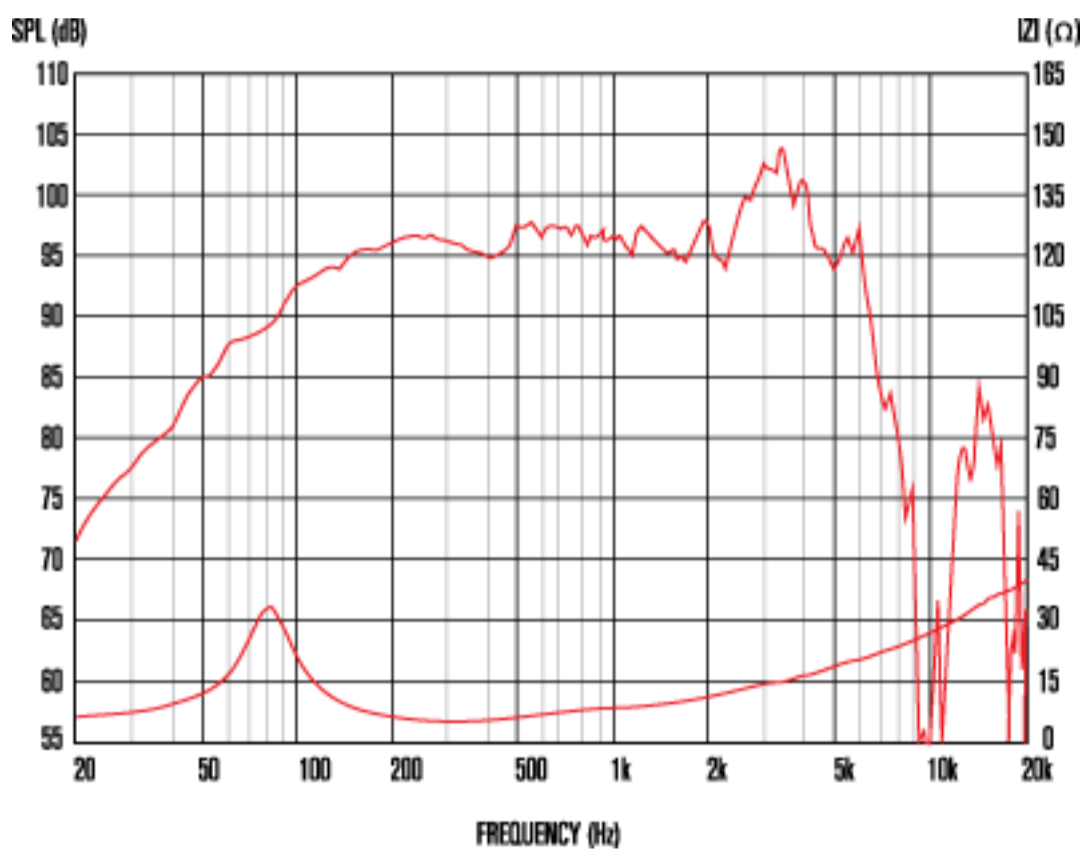

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Tested as per the EIA-426-A standard.
4. Measured on axis at 1W, 1m in 2^l anechoic environment.
5. Xmax derived from: (voice coil winding width-gap depth)/2.
6. Small signal parameters measured after unit subjected to pre-conditioning signal.

General Specifications

Nominal diameter	254mm/10in
Power rating ¹	100Wrms
Continuous power rating ²	200W
EIA power rating ³	150W
Nominal impedance	8
Sensitivity ⁴	96dB
Frequency range	70-6,000Hz
Voice coil diameter	45mm/1.75in
Chassis type	Pressed steel
Magnet type	Ferrite
Magnet weight	0.88kg/31oz
Coil material	Round copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Suspension	Single
Xmax ⁵	2mm/0.08in
Gap depth	6mm/0.24in
Voice coil winding width	10mm/0.39in

Small Signal Parameters

D	0.21m/8.27in
Fs	70.1Hz
Mms	25.91g/0.91oz
Qms	2.426
Qes	0.493
Mmd	24.67g/0.87oz
Qts	0.409
Re	5.48
Vas	33.81lt/1.19ft3
Bl	11.59Tm
Cms	0.02mm/N
Rms	4.7kg/s
Le (at 1kHz)	0.5mH

Mounting Information

Overall diameter	256mm/10.08in
Overall depth	102mm/4.02in
Cut-out diameter	229mm/9.02in
Mounting slot dimensions	8mm x 6mm/0.31in x 0.24in
Number of mounting slots	4
Mounting PCD range	245mm/9.65in
Unit weight	2.4kg/5.3lb

Packed Dimensions & Weight

Single pack size W x D x H	280mm x 280mm x 120mm /11.0in x 11.0in x 4.7in
Single pack weight	3kg/6.6lb
Multi pack size W x D x H	1080mmx880mmx840mm /42.5in x 34.6in x 33.1in
Multi pack weight	265kg/585lb