


CS 330 A

1000+1000 Watt max 2+2 Ω

\varnothing 320 mm / 12"




SUB WOOFER

Membrana in cellulosa smorzata
Sospensione in gomma

Doped paper cone
Rubber surround



| | | | | | |
|-----------------------------|---|-----|--------------------------------------|--------------|--------------------------|
| Potenza nominale | 500+500 W | Re | 1,75+1,75 Ω | D | 250 mm |
| Impedenza nominale | 2+2 Ω | Fs | 40 Hz | Vas | 30 dm³ |
| Sensibilità (1W/1m) | 91 dB | Qms | 11,54 | BxI | 21,38 Wb/m |
| \varnothing bobina mobile | 100 mm | Qes | 0,35 | Xmax | 11 mm |
| Altezza traferro | 10 mm | Qts | 0,34 | η° | 0,51% |
| Fori di fissaggio | 8 \varnothing7 / \varnothing 295 | Mms | 186 g | Le | 1,24 mH |
| Foro pannello | 282 mm | Cms | 0,09mm/N | Peso | 14 Kg |

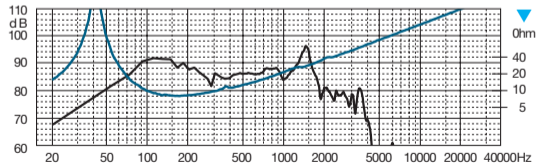

Parametri rilevati con bobine mobili in serie

Parameters taken with coils in series